

CL-4.5-MP

CLEAR FLOOR TWO POST LIFT




PROPERTY RIGHTS OVER THE PRODUCTS OF R&D, QUALITY GUARANTEE



The column design of PL-4.5-MP is symmetric shape and made of **6mm** steel plate.




High-quality locking device can lock toothing compactly.



Oil hose is installed inside the post which can avoid tubing and wires exposed.



Adding two strengthening ribs on carriage, which improve the intensity of machine.




Two-in-one unlock function, more convenient and fast for operation.


FEATURES

- * Manual release from two sides and pedal release from one side , self-locking protection device, safe and easy to operate.
- * Equip height limit switch to ensure the lifting height safely, prevent the vehicle roof from damaging.
- * Equalization of two steel cables force both sliding blocks to move synchronously, effectively prevent the vehicle from tilting
- * Minimum height of the lifting pad is 110mm, easily lift and suitable for low profile cars and SUV. Equip aluminum motor and car door-opening protection as standard configuration.
- * Reliable oil cylinder, adopts chrome-plating honed cylinder and piston rod, with Italian seals on hydraulic rams ,ensure long service life
- * Passed 115% dynamic test and 150% static test


TELESCOPIC LIFTING ARM




FOOT PROTECTION DEVICE (OPTIONAL)



USE RANGE OF LIFTING ARM

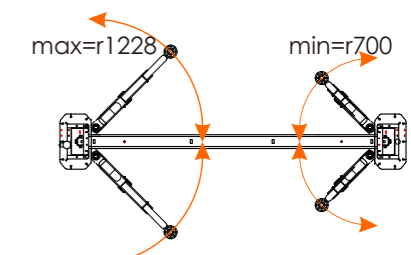

≤4500kg
(9921 lbs)



Lifting capacity

≤1850mm
(73")




Lifting height

≤2576mm
(101")



Max car width

min110mm
(4.3")



Min height

50 S



Rise time

50 S



Drop time

SPECIFICATIONS

Optional power supply 220v (1ph)/380v(3ph)
 Motor power 2.2 kw