

CL-M02


MOTORCYCLE LIFT




Features



The pneumatic front tire clamp is controlled by the pedal switch




Stabilise the platform by screwing down the lock down feet to lift the castors



Movable plate at the end of the platform, easy drive on and off

- * High quality hydraulic system
- * Double safety locks allow lifting & lowering steadily

Dimensions

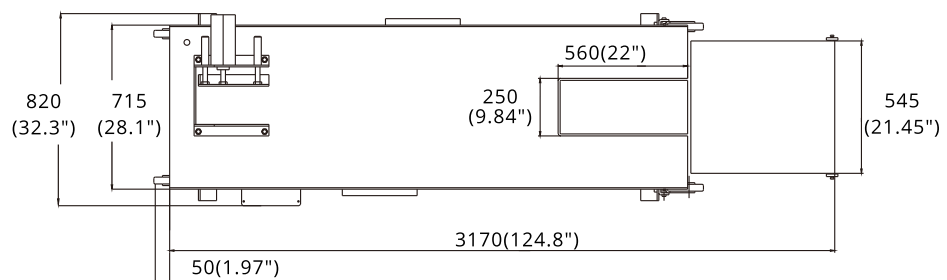

Parameters

MODEL	Lifting capacity	Lifting height	Platform length	Platform height	Lifting speed	Lowering speed	Optional power supply	Motor power
CL-M02	≤500kg (1102 lbs)	≤1200mm (47")	≤2480mm (97.6")	200mm (7.9")	35 S	35 S	110v/220v/230v /240v (1ph)	0.75 kw

