



CL-PK402


FOUR POST PARKING LIFT

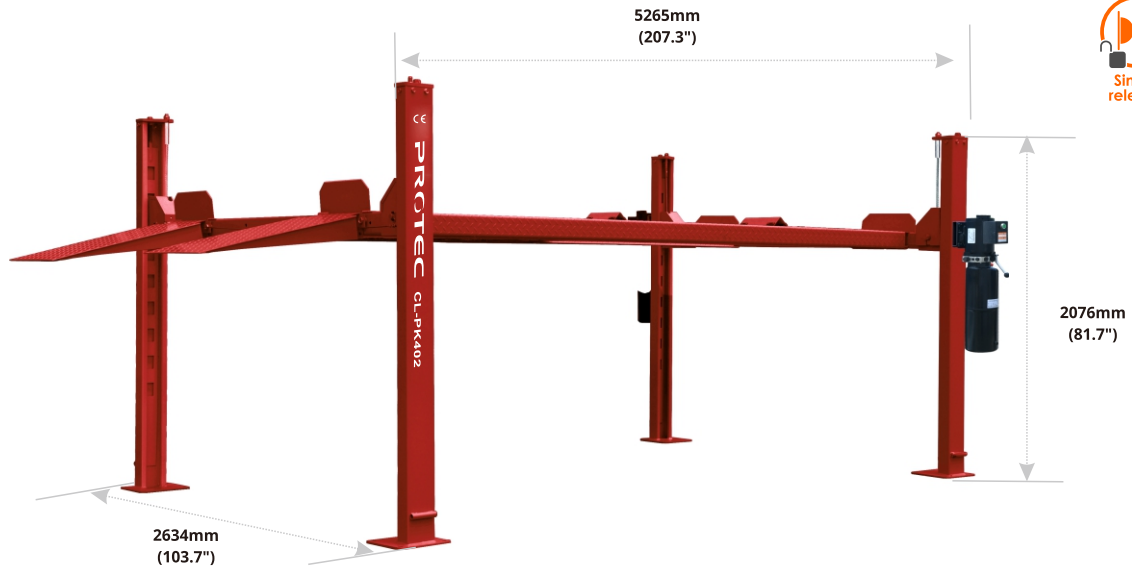

Features



Mechanical Safety & Baffle Plates



Tyre Baffle



Optional caster




Optional oil drip pan & tool tray

- * High performance hydraulic driving system
- * Perfect for parking purpose and double your parking space
- * Mechanical locking system and steel rope protection
- * Long service life with strong anti-corrosion capability


Remark: The performance of the hydraulic oil would be different in different regions or seasons, we suggest to use 46# wearable hydraulic oil between 10-55 degree, 32# between -5-10 degree, and 11# aviation hydraulic oil under -5 degree.

Dimensions

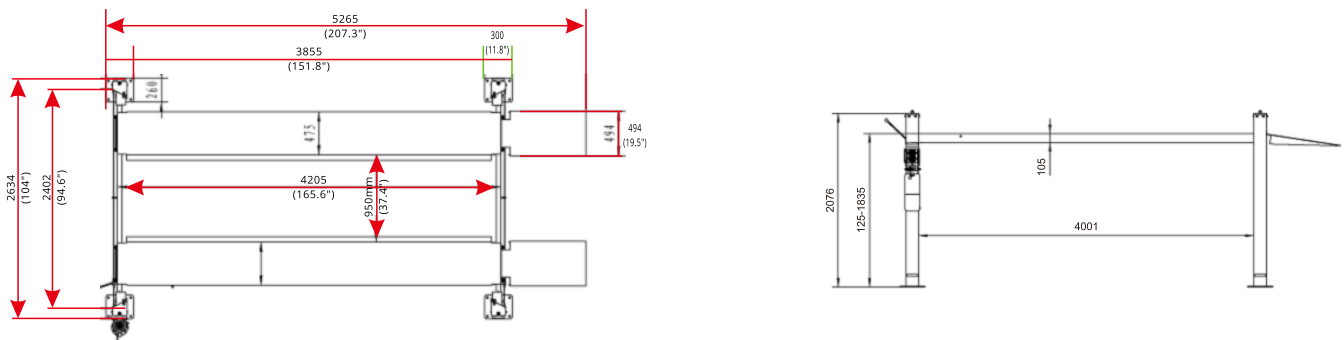


Parameters

MODEL




Lifting capacity



Lifting height



Platform length



Platform height



Lifting time



Optional power supply



Motor power

CL-PK402

≤3500kg
(7716 lbs)

≤1835mm
(72.2")

≤4001mm
(157.5")

125mm
(4.9")

50 S

220v (1ph)
/380v(3ph)

2.2 kw 50HZ

