

CL-S55A

LARGE PLATFORM SCISSOR LIFT FOR FOUR WHEEL ALIGNMENT

FEATURES

- 1 With underground installation, no need the ground space when fully lowered.
- 2 Turntable is adjustable and suitable for different automobile.
- 3 The second lifting guide rail is ready for the secondary lifting trolley (optional part).
- 4 Pneumatic safety lock is automatically engaged after pressing the up/down button.
- 5 Anti-surge valve prevents the arms from sudden falling in case of broken hydraulic hose, for both operator and vehicle's safety.
- 6 Each platform is one piece without welding to ensure flatness and durability.
- 7 Low voltage controls conform to CE standards.






INFORMATION

OPTIONAL



PROTEC
The Future Success In Automotive Tools and Equipment

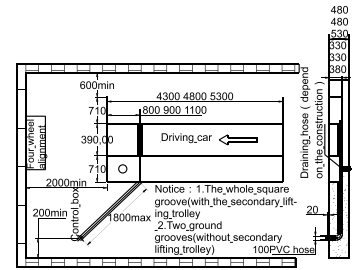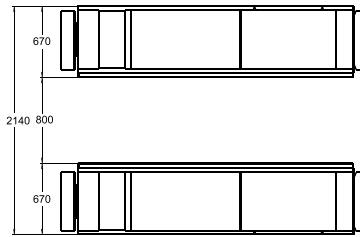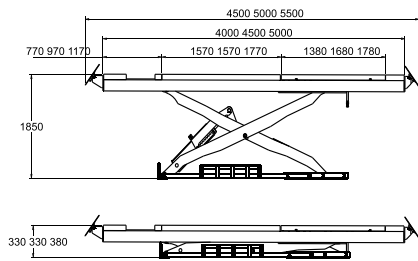

Sliding blocks adopt oil free super-wearable materials.



Adopt combined anti-abrasive material roll cage which occupied sliding flexible, especially for the four wheel alignment.



With hydraulic lock and mechanical dual-gear safety-claw lock double safety device, automatically open when lowering. By lock operation can has the safety-claw located adversely, safe & reliable.



Turntable (optional part)

TECHNICAL SPECIFICATION

Model	Machine body	Lifting capacity kg(lb)	Lifting height mm(inch)	Platform height mm(inch)	Platform length mm(inch)	Platform width mm(inch)	Lifting speed (s)	Dropping speed (s)	Width mm(inch)	Length mm(inch)
CL-S55A	Main unit	5500(12125)	1850(72.8)	380(15)	5000(197)	670(26.4)	≤55	≤55	2140 (84.3)	5500 (216.5)

PROTEC
The Future Success In Automotive Tools and Equipment

Protec Equipment Canada
2410 Dunwin Drive, Unit 5, Mississauga, Ontario L5L 1J9
Tel: 905-565-8878
Fax: 905-562-1238