


TC-1227IT

BASIC SERIES 1 year warranty

PROPERTY RIGHTS OVER THE PRODUCTS OF R&D,
QUALITY GUARANTEE

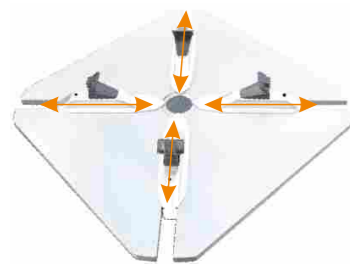

Max working clamping 24"



- * Full-automatic pneumatic tilting column
- * Vertical arm positioning automatically and synchronous pneumatic locked at any optional position
- * Clamping jaws are totally one step die casting
- * Quick air booster, esp. suitable for low profile tyres



IT inflating air tank




Noise level <75dB

Four angles directional adjustable

IT inflating pedal for IT

RIM CLAMPING METHOD

24" enlarged turntable and high power motor, which increase working strength



Inside clamping 12~24"



Outside clamping 10~21"

STANDARD PARTS



Complete pressure gauge box



Complete oil fog maker 2000



Jaw/200 protector (short)



Mount/demount head protector 7#



Tire pressing head (upper)



Tire pressing head (bottom)



Bead breaker shovel protection cover



Lifting lever




Oil-water box



Rim protection

SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
Dimension(007 help arm)	1550*310*550mm(5.1*1.0*1.8 ft)
N/G weight(main body)	229/255 kg(504/561 lbs)
N/G weight(037 help arm)	90/104 kg(198/229 lbs)
N/G weight(total)	310/359 kg(660/743 lbs)



INDEPENDENT 007B HELP ARM SYSTEM

- * Pneumatic tyre lifting device which can be lifted at any position makes it labor saving and convenient to demount/mount tyres.
- * Nylon pressing roller, can easily allow the separation of tire and rim.
- * Central positioning function: make rim and tyre detached & clamp jaws quickly and conveniently

