


TC-1291

HIGHER CLASS SERIES 2 years warranty




Max working clamping 26"

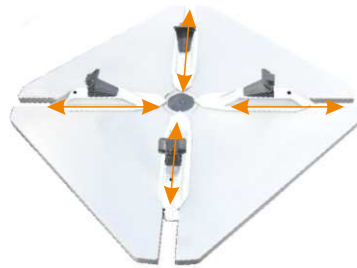

- * Pneumatic locking device between vertical arm and 098 help arm, patent unique function make the locking operation extremely easy
- * Semi-automatic swing arm
- * The round column is used as air tank
- * Clamping jaws are totally one step die casting
- * Quick air booster, esp. suitable for low profile tyres



Four angles directional adjustable



INTERNATIONAL PATENT



INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- * Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim.
- * Easy to operate, one man can dismantle big tire easily, such as tyre for BMW 7series



STANDARD PARTS



RIM CLAMPING METHOD

26" enlarged turntable and high power motor, which increase working strength



SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	242/270 kg (532/594 lbs)

