


# TC-1298IT

HIGHER CLASS SERIES 2 years warranty




Max working clamping 28"

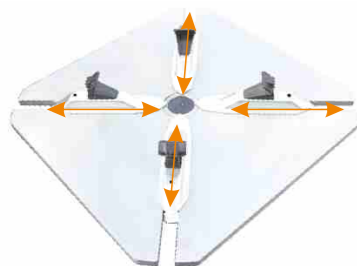


- \* Pneumatic locking device between vertical arm and 098 help arm, patent unique function make the locking operation extremely easy
- \* Semi-automatic swing arm
- \* The round column is used as air tank
- \* Clamping jaws are totally one step die casting
- \* Quick air booster, esp. suitable for low profile tyres

### RIM CLAMPING METHOD

28" enlarged turntable and high power motor, which increase working strength



Inside clamping 14~28"

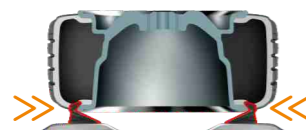

Outside clamping 12~26"



Four angles directional adjustable



### 009 MULTI-FUNCTION LEFT HELP ARM

- \* 360° rotary tyre pressing help arm, combined tyre pressing head has functions of lifting tyre, pressing tyre and central positioning.
- \* Central positioning function which can make wheel and turntable homocentric
- \* Function of lifting tire makes it easily to raise the low profile tires



### INTERNATIONAL PATENT



### INTERNATIONAL PATENT RIGHT 098 HELP ARM: SIMPLE, RELIABLE AND STABLE

- \* Nylon pressing roller helps to build a little space 2-3mm between the rim and the bird head, to avoid metal bird head scratch the rim.
- \* Easy to operate, one man can dismantle big tire easily, such as tyre for BMW 7series



### STANDARD PARTS



### SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
N/G weight	254/310 kg (559/682 lbs)

