

TC-513A TYRE CHANGER

PROPERTY RIGHTS OVER THE PRODUCTS OF R&D, QUALITY GUARANTEE



PROTEC
The Trusted Supplier in Automotive tools and equipment
Protec Equipment Canada
2410 Dunwin Drive, unit 5, Mississauga, Ontario L5L 1J9
Tel: 905-569-8878 Fax: 905-569-1238
www.protecequipment.ca



INDEPENDENT 036 HELP ARM SYSTEM


3 auxiliary functions for mounting/demounting tyres.



Tilting arm



RIM CLAMPING METHOD




Inside clamping
12~24"



Outside clamping
10~21"

TYRE DIMENSION

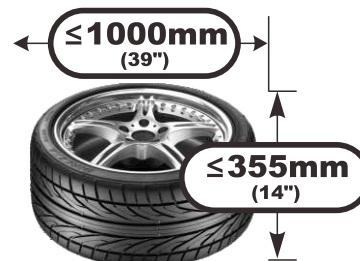

TYRE DIMENSION



1 year warranty



Noise level

SPECIFICATIONS

Working pressure	8-10bar(116-145 psi)
Optional power supply	110v (1ph)/ 220v (1/3ph)/380v(3ph)
Optional motor power	0.55/0.75/1.1 kw
Dimension(006 help arm)	1230*450*350mm(4.0*1.5*1.2 ft)
N/G weight(main body)	210/234kg (462/525 lbs)
N/G weight(037 help arm)	66/77 kg (145/169lbs)
N/G weight(total)	276/311kg(607/684 lbs)

