



## TC-612 TYRE CHANGER




### TECHNICAL DATA <<<

Power supply/ Motor power	110V/220V/380V 1.1/0.75KW
Air supply	8-12bar (0.8-1.2Mpa)
Rim clamping range ( External )	12"-26" (305mm-702mm)
Rim clamping range( Internal )	14"-28" (355mm-711mm)
Bead breaker force	5500Lb(2500Kg)
Max.Wheel diameter	43"(1100mm)
Max.Wheel width	15"(381mm)
Noise	<70dB
N.W./G.W.	704Lb/825Lb (320Kg/375Kg)

Packing size:1110×950×980(mm)

### STANDARD ACCESSORIES <<<

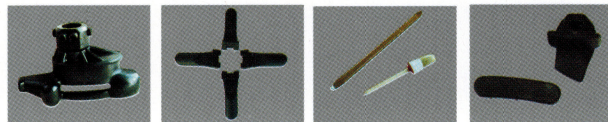

- Suitable for 12 inch to 26 inch stiff, wide, flat and low-profile tyres.
- With self-centering function.
- Clamping system with stepping function.
- Round tower serves as reserve air tank.
- Mount/demount tool with plastic protector.
- Angle of mount/demount tool can be adjusted and calibrated.
- The high quality polymer mounts/demounts tool prevents the rim from damage.
- Adapter for motorcycle(Optional).
- Bead seating inflation jets are integrated in the clamping jaws insuring quick and safe inflation.
- Wear-resistant washer & gauge.
- Assist arm.